

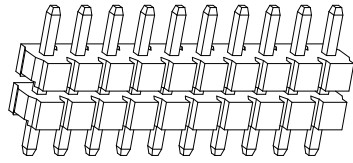



仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

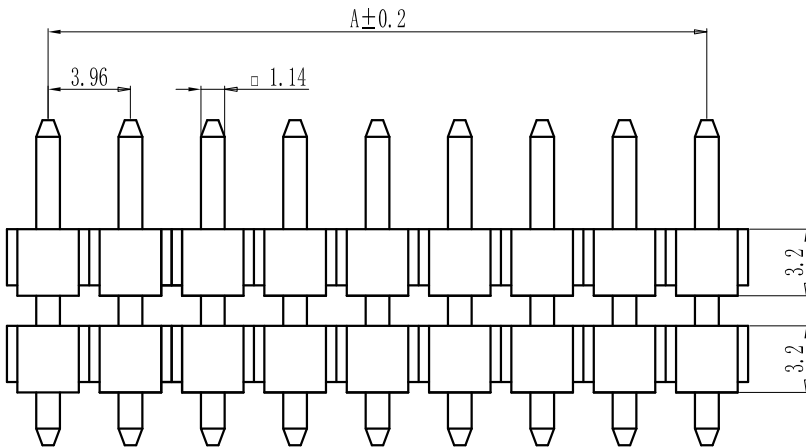


Specification:  
 Current Rating : 7AMP  
 Temperature Range : -40°Cto+105°C  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstanding Voltage : AC 1000V  
 Material:  
 Insulator : Polyester (UL94V-0)  
 Standard:PA6T/LCP  
 Contact: Brass  
 Plating : Au or Sn Over 50u" Ni

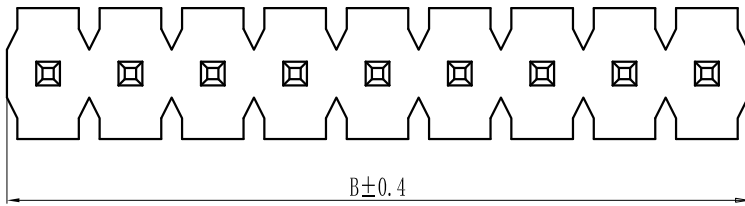

Pin数	尺寸A	尺寸B
1×1	-	3.96
1×2	3.96	7.92
1×3	7.92	11.88
1×4	11.88	15.84
1×5	15.84	19.80
1×6	19.80	23.76
1×7	23.76	27.72
1×8	27.72	31.68
1×9	31.68	35.64
1×10	35.64	39.60
1×11	39.60	43.56
1×12	43.56	47.52
1×13	47.52	51.48
1×14	51.48	55.44
1×15	55.44	59.40
1×16	59.40	63.36
1×17	63.36	67.32
1×18	67.32	71.28
1×19	71.28	75.24
1×20	75.24	79.20

PCB LAYOUT

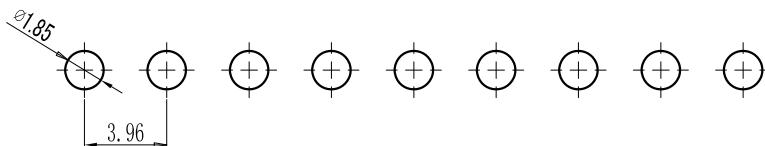

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO.,LTD 公司网址: www.szsituo.cn      公司电话: 0755-23765350 邮 箱: 2850175982@qq.com      公司传真: 0755-23765341	PART. NO: ST-PH-396-0118	
	LINEAR	ANGLES					APPROVED	DWG. NO:
UNIT: MM	0.00±0.20	X° REF±6°	DESIGNER	TITLE:	Pitch3.96mm Pin Header, Dual Plastic, Single Row, DIP	REV: A0	SHEET: 1/1	
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	肖坤权	2017.06.16			