

仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017. 06. 16

Specification:

Current Rating : 3.0AMP

Temperature Range : -40°Cto+105°C

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 1000V




Material:

Insulator : Polyester (UL94V-0)

Standard:PA6T/LCP



Contact: Brass

Plating : Au or Sn Over 50u" Ni

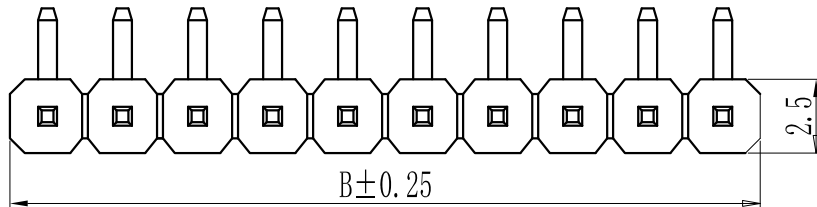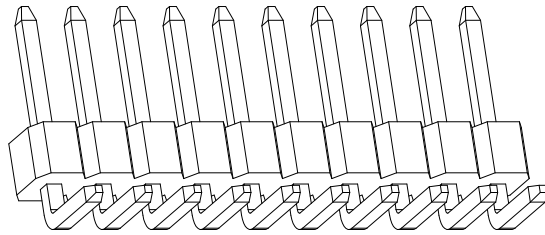


Height

H=1.0mm、1.5mm、1.7mm、2.0mm、2.5mm、3.3mm

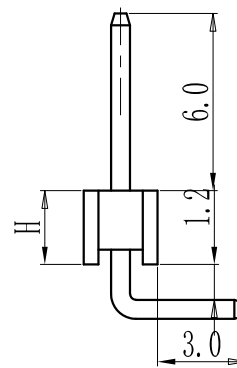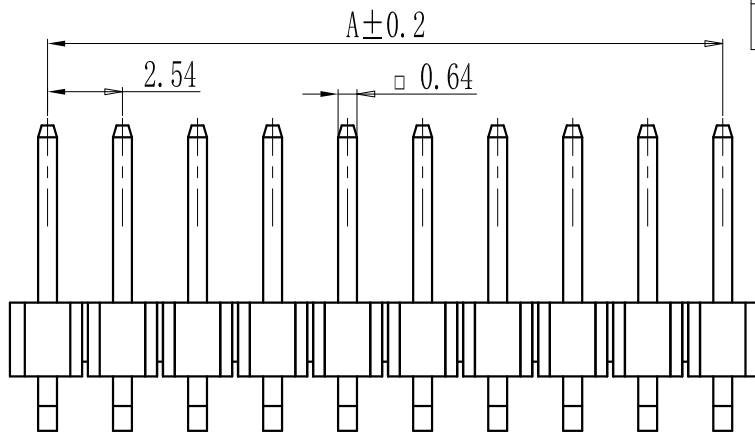

PCB LAYOUT

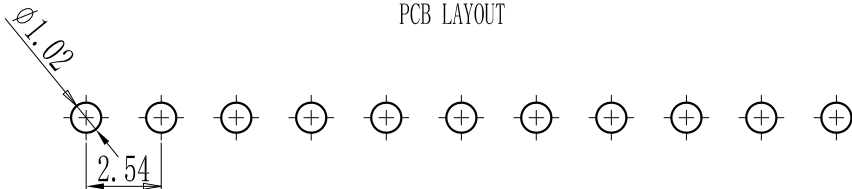

Pin数	尺寸A	尺寸B
1X1	-	2.54
1X2	2.54	5.08
1X3	5.08	7.62
1X4	7.62	10.16
1X5	10.16	12.70
1X6	12.70	15.24
1X7	15.24	17.78
1X8	17.78	20.32
1X9	20.32	22.86
1X10	22.86	25.40
1X11	25.40	27.94
1X12	27.94	30.48
1X13	30.48	33.02
1X14	33.02	35.56
1X15	35.56	38.10
1X16	38.10	40.64
1X17	40.64	43.18
1X18	43.18	45.72
1X19	45.72	48.26
1X20	48.26	50.80
1X21	50.80	53.34
1X22	53.34	55.88
1X23	55.88	58.42
1X24	58.42	60.96
1X25	60.96	63.50
1X26	63.50	66.04
1X27	66.04	68.58
1X28	68.58	71.12
1X29	71.12	73.66
1X30	73.66	76.20
1X31	76.20	78.74
1X32	78.74	81.28
1X33	81.28	83.82
1X34	83.82	86.36
1X35	86.36	88.90
1X36	88.90	91.44
1X37	91.44	93.98
1X38	93.98	96.52
1X39	96.52	99.06
1X40	99.06	101.60

UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO: ST-PH-254-0091	DWG. NO:
	LINEAR	ANGLES					
0.0±0.30	X° REF±6°		APPROVED				
0.00±0.20	X° ±3°		DESIGNER				
0.000±0.10	X° X'±2°		DRAWN	肖坤权	2017. 06. 16	REV: A0	SHEET: 1/1



深圳市思拓展电子有限公司
SHENZHEN SINOTOP ELECTRONICS CO.,LTD

公司网址: www.szstuo.cn
邮 箱: 2850175982@qq.com

公司电话: 0755-23765350
公司传真: 0755-23765341

TITLE:
Pitch2.54mm Pin Header,Single Plastic,
Single Row,Right Angle Type