

仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specifications:

Voltage Rating : 600V AC/DC






Current Rating : 10A AC,DC

Withstand Voltage : 2200V AC/minute

Contact Resistance : 10mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -40°C~+120°C

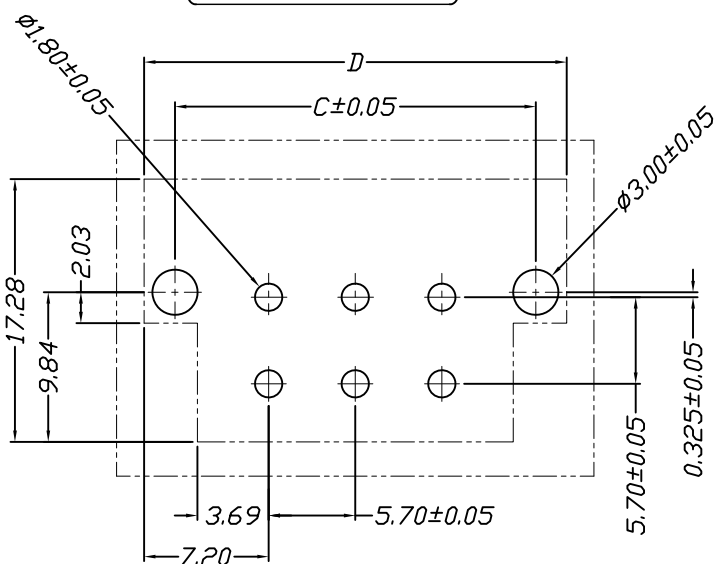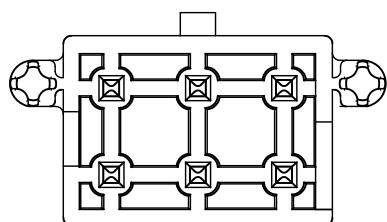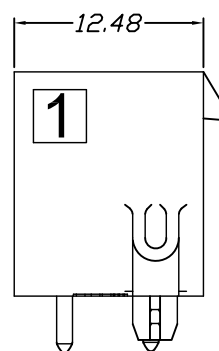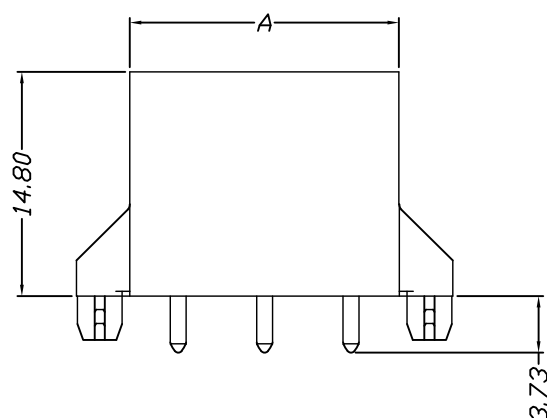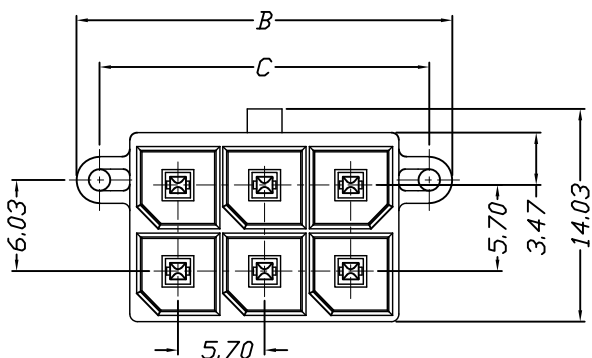

P.C.B. LAYOUT

Unit: mm

Part No.	A	B	C	D
2*1P	8.35	15.39	12.34	16.40
2*2P	12.05	19.09	16.04	20.10
2*3P	17.75	24.79	21.74	25.80
2*4P	23.45	30.49	27.44	31.50
2*5P	29.15	36.19	33.14	37.20
2*6P	34.85	41.89	38.84	42.90

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass/Gold&Ni-plated

GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	STP 深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szstuo.cn 公司电话: 0755-23765350 邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: STP45701W00-2XNP*-A1-**
UNIT: MM	0.00±0.25	DESIGNER		TITLE: 5.70mm pitch Dual Wafer	DWG. NO:
SIZE: A4	0.000±0.15	DRAWN	肖坤权		
			2017.06.16	REV: A0	SHEET: 1/1

仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specifications:

Voltage Rating : 600V AC/DC






Current Rating : 10A AC,DC

Withstand Voltage : 2200V AC/minute

Contact Resistance : 10mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -40°C~+120°C

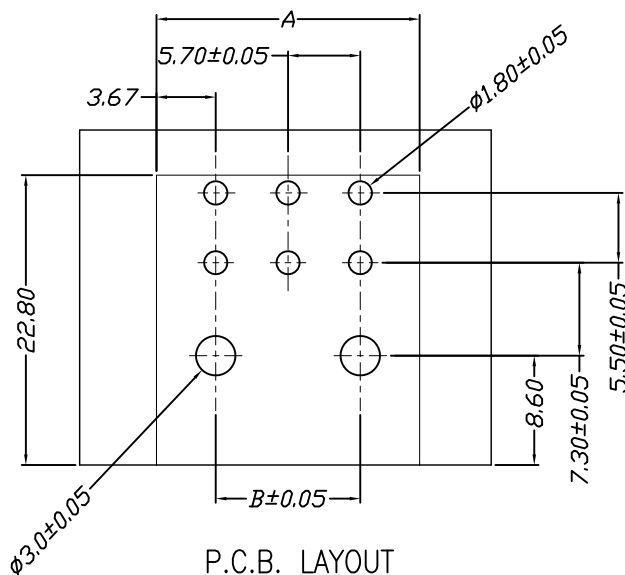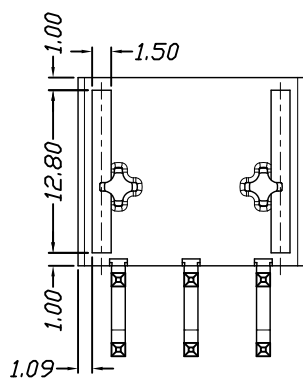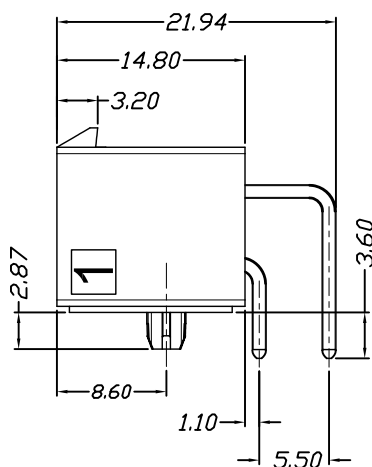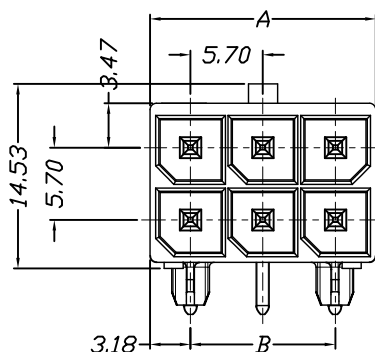

Unit: mm

Part No.	A	B
2*1P	8.35	N/A
2*2P	12.05	N/A
2*3P	17.75	11.40
2*4P	23.45	17.10
2*5P	29.15	22.80
2*6P	34.85	28.50

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass/Gold&Ni-plated



UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	TITLE:	PART. NO:
	LINEAR	ANGLES					
0.0±0.35	X° REF±6°		APPROVED				STP45701W90-2XNP*-A1-*
0.00±0.25	X° ±3°		DESIGNER				DWG. NO:
0.000±0.15	X° X'±2°		DRAWN	肖坤权	2017.06.16	5.70mm pitch Dual Wafer	REV: A0 SHEET: 1/1



深圳市思拓展电子有限公司
SHENZHEN SINOTOP ELECTRONICS CO., LTD

公司网址: WWW.SZSITUAO.CN 公司电话: 0755-23765350
邮 箱: 2850175982@qq.com 公司传真: 0755-23765341

Temperature Range : $-40^{\circ}\text{C} \sim +120^{\circ}\text{C}$

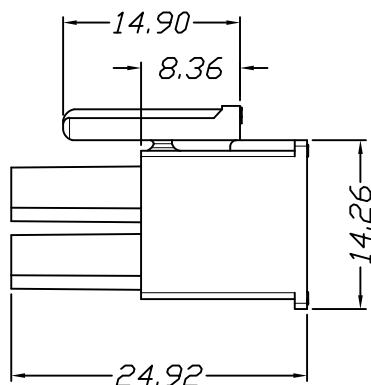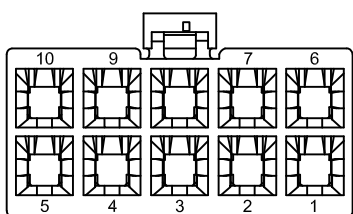

Part No.	Dimensions
	A
2*1P	8.35
2*2P	12.05
2*3P	17.75
2*4P	23.45±0.4
2*5P	29.15±0.4
2*6P	34.85±0.4

Material	Color
PBT,UL94V-0	Gray

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司地址: WWW.SZSITUA.CN 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: STP45701H00-2XNP*-PT	
	LINEAR	ANGLES	APPROVED				DWG. NO:	
	0.0±0.35	X° REF±6°						
UNIT: MM	0.00±0.25	X° ±3°	DESIGNER			TITLE: 5.70mm pitch Dual Housing	REV: A0 SHEET: 1/1	
SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	肖坤权	2017.06.16			

仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017. 06. 16

Specifications:

Voltage Rating : 600V AC/DC





Current Rating : 10A AC,DC

Withstand Voltage : 2200V AC/minute

Contact Resistance : 10mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -40°C~+120°C

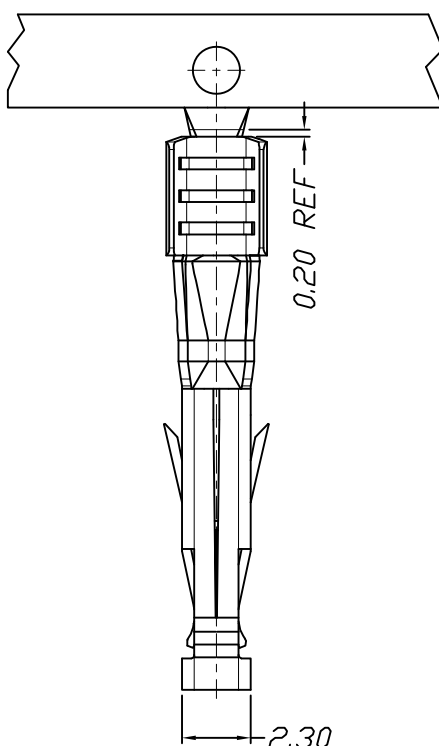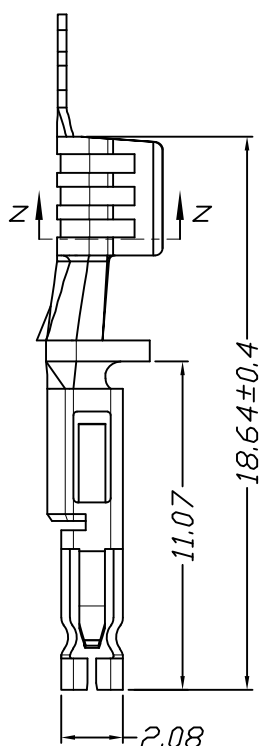

Ordering Information & Specifications

Part No	Wire Range	WIRE SIZES	Material	Finish
STP45701T00-**-**	AWG#15-16	1. 5mm ²	Phosphor Bronze	Sn or Au
STP45701T01-**-**	AWG#12	4. 0/2. 5mm ²	Phosphor Bronze	

Unit: mm

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szsituo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: STP45701T0*-**-**
	LINEAR	ANGLES	APPROVED				DWG. NO:
	0. 0±0. 35	X° REF±6°	DESIGNER				REV: A0
	UNIT: MM	0. 00±0. 25	X° ±3°				SHEET: 1/1
SIZE: A4	0. 000±0. 15	X° X'±2°	DRAWN	肖坤权	2017. 06. 16	TITLE: 5. 70mm pitch Crimp Terminal	